


Center Line Tie Points



NOTES:

- 1. All tie points shall be lead and tacks. Lead shall be a min. of ¾" deep and tacks shall be made of brass.
- 2. All intersection and centerline control points shall be spike and washer.
- 3. All control points shall have a min. of 4 ties with ties placed such that proper angle is obtained from the tie to the control point as determined by the City Engineer.
- 4. Record centerline tie data on the sheet available at the City of Orange, Engineering Division.

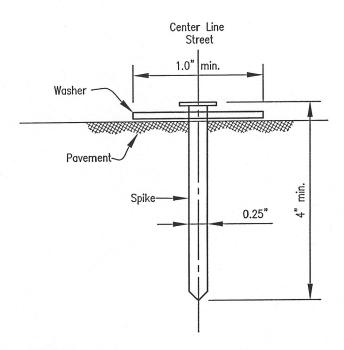

-16-04 CITY OF ORANGE

PUBLIC WORKS DEPARTMENT

STANDARD PLAN No. 400

CENTERLINE TIES

DATE APPROVED

DATE APPROVED

DELIC WORKS DIRECTOR/C.E.

ASSISTANT CITY ENGINEER